


NPS	L	d	NPT	D	Weight (lb)
1/4"	2.402	0.315	1/4"	1.280	0.353
3/8"	2.402	0.394	3/8"	1.280	0.353
1/2"	2.402	0.551	1/2"	1.280	0.375
3/4"	2.598	0.748	3/4"	1.535	0.573
1"	3.051	0.945	1"	1.870	0.904
1 1/4"	3.386	1.220	1 1/4"	2.303	1.455
1 1/2"	3.740	1.535	1 1/2"	2.598	2.028
2"	4.173	1.929	2"	3.130	2.888

Nominal pressure			4.0Mpa		
Test pressure	Shell test	6.0	Test medium	Water	Test temperature
	Seal test	4.4		Air	
Gas seal test	0.6		Water, Oil, Gas	Normal temperature	
Applicable medium			Water, Oil, Gas		
Applicable temperature			-20~302°F		

**NOTE:**

1. Design and Manufacture for valve according to ASME B16.34.
2. Inspection and Test for valve according to API 598.
3. The connection of screwed for valve according to ANSI B1.20.1.

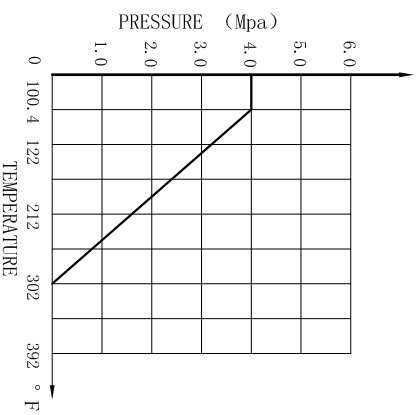

5	BONNET	1	A351 CF8M
4	GASKET	1	PTFE
3	SPRING	1	SS316
2	DISC	1	A351 CF8M
1	BODY	1	A351 CF8M
NO.	DESCRIPTION	QTY	MATERIAL
MARK		BEFORE MODIFIED	AFTER MODIFIED
DRAW.	DATE	APP.	DATE
CHK.	DATE		
ANIX VALVE CO., LTD		SCALE	
2PC Chevk Valve PN40, NPT		CV12W6N/40	