


| NPS | L | d | NPT | Weight (lb) |
|--------|-------|-------|--------|-------------|
| 1/4" | 2.953 | 0.433 | 1/4" | 0.882 |
| 3/8" | 2.953 | 0.433 | 3/8" | 0.882 |
| 1/2" | 2.953 | 0.551 | 1/2" | 0.882 |
| 3/4" | 3.150 | 0.748 | 3/4" | 1.058 |
| 1" | 3.386 | 0.945 | 1" | 1.378 |
| 1 1/4" | 4.094 | 1.220 | 1 1/4" | 1.918 |
| 1 1/2" | 4.528 | 1.535 | 1 1/2" | 3.395 |
| 2" | 4.803 | 1.929 | 2" | 4.861 |

| Nominal pressure | | 4.0Mpa | |
|------------------------|---------------|-----------------|-------------|
| Test pressure | Shell test | 6.0 | Test medium |
| | Seal test | 4.4 | |
| | Gas seal test | 0.6 | |
| Applicable medium | | Water, Oil, Gas | |
| Applicable temperature | | -20~302°F | |

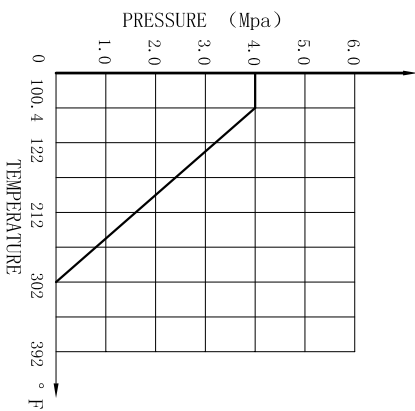

NOTE:
 1. Design and Manufacture for valve according to ASME B16.34.
 2. Inspection and Test for valve according to API 598.
 3. The connection of screwed for valve according to ANSI B1.20.1.

| | | | |
|---------------------------|-------------------|----------------|-----------|
| 8 | NUT | - | A194 8 |
| 7 | SPRING WASHER | - | 304 |
| 6 | HEXAGON HEAD BOLT | - | A193 B8 |
| 5 | BODY | 1 | A351 CF8M |
| 4 | SPRING | 1 | SS316 |
| 3 | DISC | 1 | A351 CF8M |
| 2 | GASKET | 2 | PTFE |
| 1 | BONNET | 2 | A351 CF8M |
| NO. | DESCRIPTION | Q'TY | MATERIAL |
| ANIX® | | | |
| ANIX VALVE CO., LTD | | | |
| 3PC ChevK Valve PN40, NPT | | | |
| CV13W6N/40 | | | |
| MARK | BEFORE MODIFIED | AFTER MODIFIED | DATE |
| DRAW | | | |
| CHK. | | | |